



# 3M™ Super Close Projection System SCP715


Whether you're looking for bright and colorful projected presentations, or you have projection room space constraints, the 3M Super Close Projection System SCP715 is the ideal solution. Utilizing 3M's patented technology, you can display large images with this tabletop or ceiling mounted projector close to the screen, for the ultimate professional image.



3M SCP715 Projector  
78-9236-6937-4

## Features

- Two computer/component RGB inputs
- One computer RGB output – ideal for teacher's monitor
- RJ-45 ethernet connection provides network capabilities and basic remote administration
- RS232 connection for basic remote control
- +5V/2A DC power output
- S-video input for connecting a DVD/analog video device
- DVI-D connection
- RCA Audio/Video for camcorders, digital cameras, gaming and more
- One USB port
- Audio output connection can be used with personal speakers

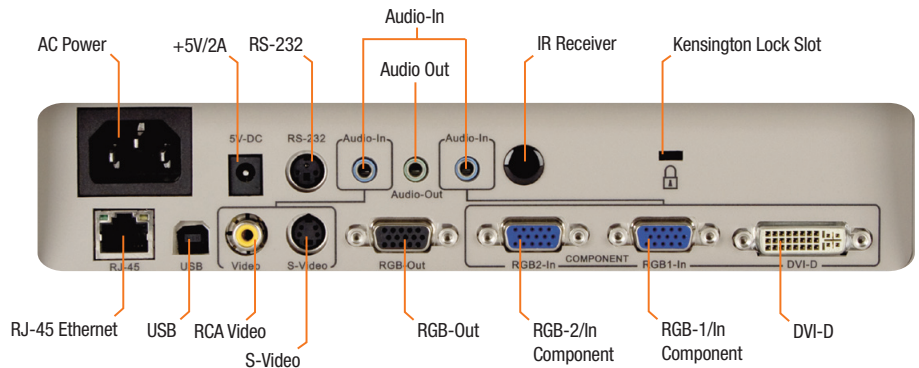

## Optical

### Vikuiti™ Super Close Projection technology by 3M

#### DMD Panel

.7 in. DLP

#### Resolution

Native: true XGA (1024 x 768)

#### Aspect Ratio

4:3 native and 16:9 supported

#### Contrast Ratio

1600:1

#### Digital Zoom

100% to 200%

#### Brightness

2200 lumens (maximum rating)

#### Projection Lens

F2.6

#### Throw Ratio (Distance: Image Width)

0.68

#### Image Size (range)

30-120 inches (.76m-3.04m)

#### Focus

Manual (1.2x)

#### Lamp

180W (normal mode), 150W (whisper mode)

#### Lamp Life

2000 hours (normal)

Up to 3000 hours (whisper)

#### Security

Integrated Kensington Lock Slot

## Size

#### Dimensions (W x D x H)

12.5 x 12.2 x 4.9 in. (317.5 x 309.98 x 124.46mm)

#### Weight

9.9 lbs (4.5kg)

## System Specifications

#### Video Compatibility

NTSC, PAL, SECAM, 480i/p (1080i), 720p

#### PC Compatibility

640 x 480 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 960\* (iMAC), 1152 x 870\* (MAC), 1024 x 768 (MAC 19")

\*resolution digitally compressed

#### Digital Keystone Correction

Vertical ±16 degrees

#### Audio Output

Two 2 Watt speakers

#### Noise Level

Normal 35dB; Whisper 32dB

#### Power Consumption

200W (Max, <20K Stand by)

#### Power Supply

Universal: 100-130V/220-240V, 50/60Hz

#### Regulatory Approvals

FCC Class B, CCC for China, NOM, EK, cULus, CE Class B, RoHS

## Warranties

For details see [www.3m.com/meetings/warranties](http://www.3m.com/meetings/warranties)

#### Projector

3 year limited, parts and labor on projector (see website for optional warranty)

#### Lamp

90 days or 180 hours with remainder of year 1 prorated

## Technical Support

- Free unlimited software downloads and updates available on our website at [www.3m.com/meetings](http://www.3m.com/meetings)
- 24/7 Technical Support by calling 800.328.1371



## Accessories Included

- 1.8m power cord (US, UK, Europe)
- 1.8 m 15 pin D-sub VGA cable
- 3.5mm audio cable
- USB cable
- Remote control with batteries
- Multi-language Operator's Guide (CD)
- Quick Start Guide
- Product Safety Guide
- WEEE card (EMEA)

## Optional Accessories

- SCP715 lamp replacement kit 78-6969-9949-5
- C1 universal ceiling mount -black 78-6969-9928-9
- C1 universal extender pole & plate -black 78-6969-9927-1 (Order if required to match SKU 78-6969-9928-9)
- P1 universal ceiling mount -white 78-6969-9874-5

Image Size	
Screen Size Diagonal [inch (m)]	Projection Distance Maximum [inch (m)]
60" (1.5)	32.6" (.82)
70" (1.7)	38.1" (.97)
80" (2.0)	43.5" (1.10)
90" (2.3)	48.9" (1.2)
95" (2.4)	51.7" (1.3)
100" (2.5)	54.4" (1.38)

Note: These sizes are ±10 percent. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.



800.328.1371 | [www.3m.com/meetings](http://www.3m.com/meetings)



### 3M Projection Systems

Building A147-5N-01  
6801 River Place Blvd.  
Austin, TX 78726-9000  
USA

### 3M Canada

PO Box 5757  
London,  
Ontario, Canada  
NGA 4T1

### 3M Mexico, S.A. de C.V.

Apartado Postal 14-139  
Mexico, D.F. 07070  
Mexico

#### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

#### Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of 3 years from the time of purchase. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted. Specifications subject to change without notice.

3M, and the 3M logo are trademarks of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.