

PXDUO-65P Specifications


Hardware Specifications

Main Unit

Model No.	PX-DUO-65P
Display Type	Plasma Overlay (Plasma not included)
Digitizing Technology	Infrared Image Sensor System
Coordinate Resolution	Approx. 500 lpi
Sampling Rate	Approx. 100 points/s (USB 1.1 full speed)
Interface to Computer	USB 1.1, 2.0 (cable length: 20.3 ft.)
Effective Detection Area	65 inches
Power Consumption	5V 500mA (USB Bus Power)
External Dimensions	61.3"(W) x 41"(H) x 2.6(D)
Digitizer Weight	Approx. 21 lbs.
Operating Requirements	41-95 °F (5-35 °C) 20-80% Humidity
Function Buttons	16 (14 customizable)
Certificates	VCCI-B, FCC-B, CE
Warranty	1 year warranty

Electronic Pen

Communication System	Infrared
Power Supply	AAA Alkaline
Battery Life	Approx. 80 hrs (continuous use)
Function Buttons	3

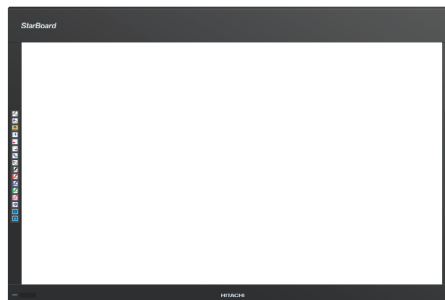

Others

Packing Dimension	65.5(W) x 5.7(H) x 45.8(D)
Packing Weight	Approx. 39.7 lbs.
Supplied Accessories	2 retractable styluses, electronic pen w/ AAA Alkaline battery, Users Guide
Electronic Pen Warranty	1 year warranty
Required Components	
Plasma Display Models	TH-65PF10, TH-65PF11, TH-65PF12 (Panasonic)

Standard Features

- Control using multi-touch hand gestures
- Use your finger, stylus, or any object to operate
- 16 Function buttons (14 customizable) on each side
- Electronic pen with 3 customizable buttons included
- StarBoard Software included
- Interactive presentation without the need for a projector
- Easy hardware installation
- Only send in top sensor for repair

System Requirements

PC Requirements

CPU	Intel Pentium 4 1.8GHz or higher
RAM	1 GB or more is recommended
HDD	300 MB of free space
Display Color Depth	16 bit or more
Software Required	I.E. 6.0 or higher, MS Office 2000 or higher for importing documents, DirectX 9.0b
Hardware Required	CD-ROM or DVD drive
OS	Microsoft Windows XP/Vista Latest service pack must be applied
Other	Video card w/ hardware overlay for video function RAM 512MB or more for movie feature

Mac Requirements

CPU	Intel® processor
RAM	1 GB or more is recommended
HDD	300 MB of free space
Display Color Depth	16 bit or more
Software Required	MS Office 2004 or higher for importing documents
Hardware Required	CD-ROM or DVD drive
OS	Mac OS X 10.4 or higher
Other	Built-in display or display connected to Apple supplied video card supported by your Mac
*Note:	Currently there is no support or compatibility for Mac OS 10.6 (Snow Leopard)


Hitachi Software Engineering America, Ltd.

900 Hitachi Way Chula Vista, CA 91914
Telephone: 1-800-HITACHI
starboard@hitachi-soft.com
www.hitachi-soft.com

PXDUO-65P Specifications


Dimensions

Top View

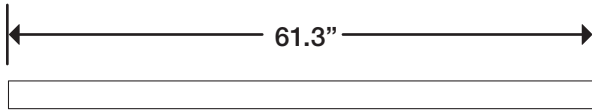


Front View


Infrared Image Sensor System

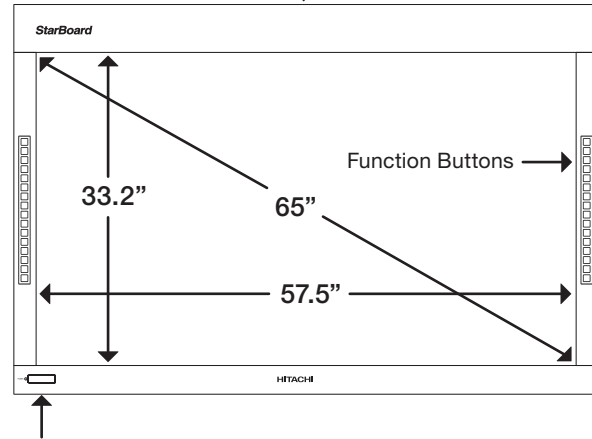

Electronic Pen
(included)

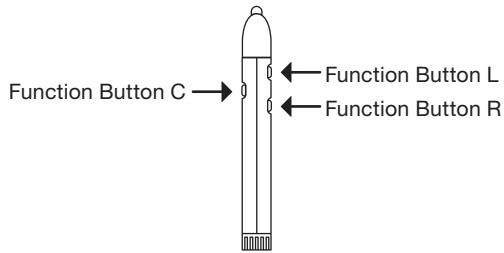

Back View

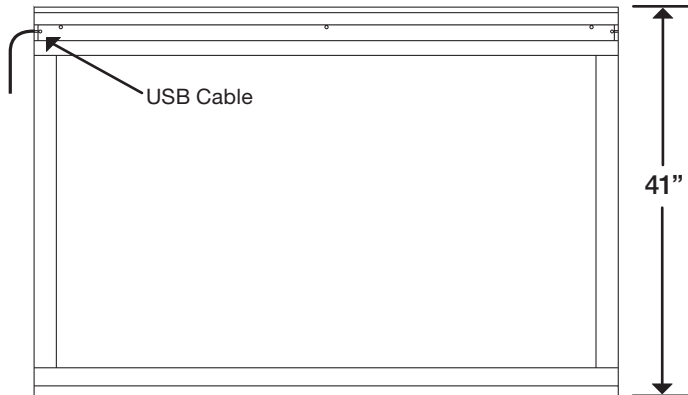

Side View



Retractable Stylus
(included)



Hitachi Software Engineering America, Ltd.

900 Hitachi Way Chula Vista, CA 91914
Telephone: 1-800-HITACHI
starboard@hitachi-soft.com
www.hitachi-soft.com