

Specifications

SMART kapp iQ

SMART kapp iQ™ 55 board

Overview

With a SMART kapp iQ™ 55 board, you can capture notes and ideas, present information and collaborate with others in simple but powerful ways.

Connect a Bluetooth®-enabled mobile device to the board by scanning the Quick Response (QR) code on the board's screen. When you first connect your mobile device, you're directed to the Apple App Store or Google Play™ to download the SMART kapp® app. After installing the app, you can connect to your board and share notes with others. You can write notes in black or red ink using the provided pens and erase notes with the pens' erasers or with your palm or fist.


The board's 4K ultra-high-definition resolution display provides optimal image clarity and viewing from any angle.

See education.smarttech.com for more information about SMART kapp iQ.



Dimensions and weights¹

Dimensions

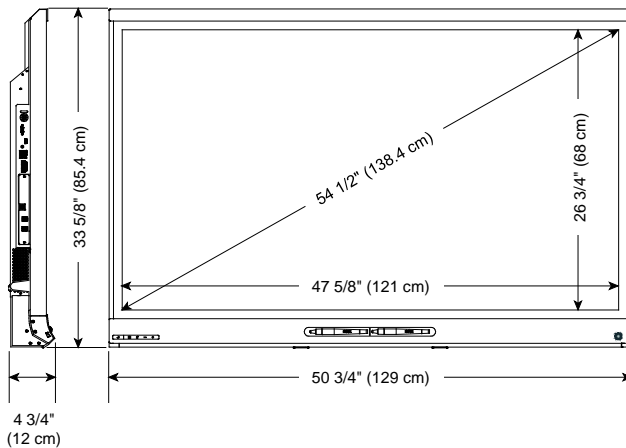

Weight

107 lb. (48.4 kg)

Shipping dimensions (including pallet)

59 7/8" × 11" × 44 1/4"

(152 cm × 28 cm × 112.5 cm)

Shipping weight

146 lb. (66.4 kg)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Interaction

Touch technology	DViT® (Digital Vision Touch) technology
Multitouch capabilities	4 touches
Object awareness	Behavior adjusts automatically to whatever tool or object is being used, whether it's a pen, finger, eraser or palm.
Pen ID™	Two people can write independently and simultaneously, using different colored ink.

Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 30 Hz (HDMI® input only)
Horizontal frequency	244–280 kHz (analog and digital)
Vertical frequency	24–120 Hz
Contrast ratio (typical)	1400:1
Brightness (typical)	280–360 cd/m ²
Pixel pitch	0.315 mm
Gamut	72% of NTSC
Viewing angle	178°
Response time	8 ms



Wireless technology	Bluetooth 4.0 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the board's unique QR code
Presence detection	Presence detection sensor on the bottom frame
Audio	10 W integrated side-firing speakers (×2)
Noise level	35 dBA
Included cables and accessories	8' (2.4 m) country-specific power cable 16' 5" (5 m) USB cable ² Pen (×2)
Included hardware	AM30-EDU appliance
Mounting holes	For a standard VESA® 400 mm × 400 mm mounting plate 11 1/8" (28.2 cm) from the bottom of the interactive flat panel

²HDMI cable not included (See *Installation requirements* for HDMI cable requirements.)

Mounting bracket depth Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the interactive flat panel to clear the wall

Connectors

Side	Side connector panel: USB 2.0 Type-B HDMI 1.4 in Stereo 3.5 mm out RS-232 in	AM30-EDU appliance: USB 3.0 Type-A (x2) USB 2.0 Type-B ³ USB 2.0 Type-B ⁴ HDMI 1.4 in ⁵ HDMI 1.4 out ⁶ RJ45
Bottom	USB 2.0 Type-A	
Back	AC power inlet	

Installation requirements

Board	See the <i>SMART kapp IQ boards administrator's guide</i> (smarttech.com/kb/171038)	
SMART kapp app		
Apple devices	iOS 8.1 or later operating system software 50 MB of storage iPhone 4S or later Third generation iPad or later First generation iPad mini or later Fifth generation iPod touch or later	
Android™ devices	Android 4.4.4 (KitKat) or later operating system 50 MB of storage (internal or SD card) 1024 MB of RAM 720p or better screen resolution Bluetooth 2.1 + EDR 3 megapixel or better rear-facing camera (recommended)	
SMART kapp viewer		
Mobile	Safari for iOS 8.1 or later operating system software Chrome™ for Android 39.0.2171.93 or later	
Desktop	Internet Explorer® 10 or later Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later	

³For service use only

⁴Available August 2016

⁵Available August 2016

⁶Available August 2016

Room computers and guest laptops

General requirements	See smarttech.com/kb/170978
4K UHD	Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory See kb.smarttech.com/?q=15546
HDMI cable	HDMI 1.4 compliant or better Maximum recommended passive length of 25' (7.6 m)

Storage and operating requirements

Power requirements	90V to 240V AC, 50 Hz to 60 Hz
Power consumption at 77°F (25°C)	
Standby mode	25 W
Normal operating	122 W
Maximum operating	134 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification	UL (U.S./Canada), FCC, IC, CE Mark, RCM Mark
Environmental compliance	
European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

Purchasing information

Order number	
Kapp-iQ55	SMART kapp iQ 55 board
Optional accessories	
WM-SBID-501	Fixed wall mount for SMART interactive flat panels
Other	See smarttech.com/businessaccessories
Warranty	Two-year limited equipment warranty

smarttech.com/support
smarttech.com/contactsupport

© 2016 SMART Technologies ULC. All rights reserved. SMART kapp, SMART kapp iQ, DVIT, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. iPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. HDMI and all associated logos are trademarks of HDMI Licensing, LLC. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 06/2016.